



# PGX B1 with triple glazed unit



Uw = 0,64 W/m²K

GLAZING UNIT

Ug = 0,5 W/m²K


**10** years  
\*  
GUARANTEE  
FOR WINDOWS

**5** years  
\*  
GUARANTEE  
FOR WINDOWS

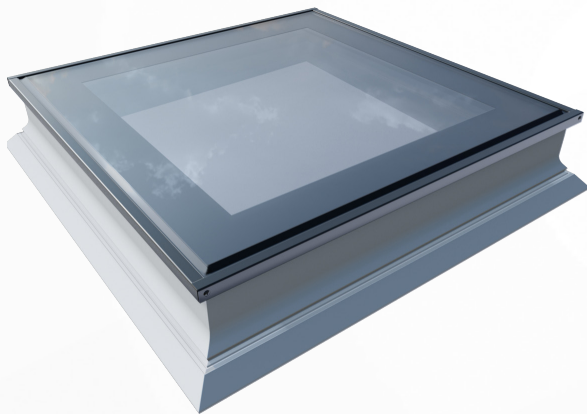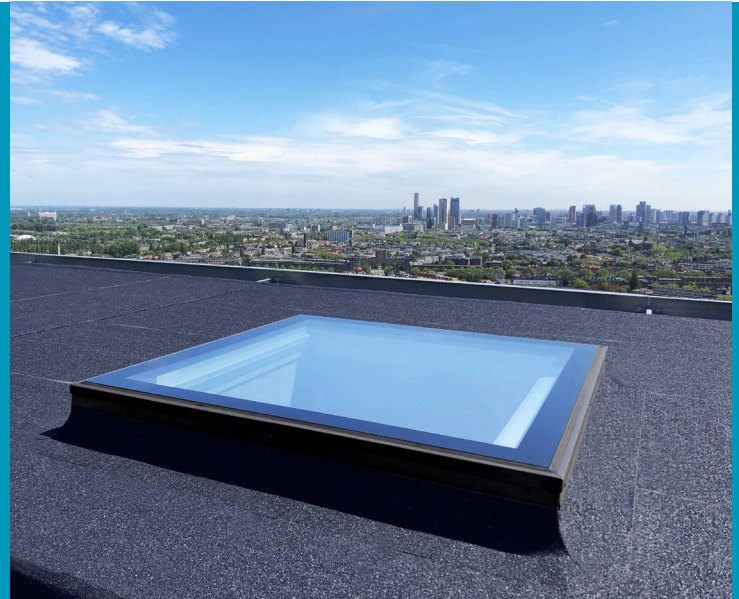

### GLAZING

double chamber glazing unit  
noble gas - argon  
2x warm spacer  
2x low emission coat  
outer toughened pane  
laminated inner pane



6H/16/6TH/16/44.2TF (AR)

### PROFILE TYPE

multi-chamber pvc profile in white colour,  
resistant to influence of atmospheric factors,  
filled with polyurethane foam




outside covering in RAL 7022

### ROOF PITCH 2°-15°



### ACCESSORIES

It is possible to order a roller shutter  
for flat roof windows



### Standard dimensions:

size symbol	01P	02P	12P	03P	04P	05P	06P	07P	08P	09P	10P	11P
width x height [cm]	60×60	90×60	120×60	70×70	80×80	90×90	120×90	100×100	150×100	120×120	140×140	220×120
PGX B1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

\*Details about the guarantee policy available at [www.okpol.com](http://www.okpol.com)