PRODUCT CARD

OKPOL® ROOF WINDOWS

PGX A5 WALK ON

2-GLAZED NON-OPENING WINDOW FOR FLAT ROOFS THAT CAN BE WALKED ON

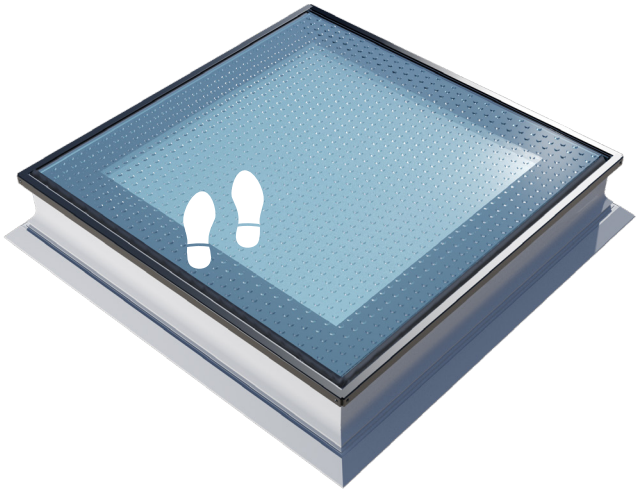



INTENDED USE
in roofs with a pitch of 2°-15°
window designed for communication in residential and commercial locations
recommended for kitchens and bathrooms (rooms with high humidity) as well as living rooms, bedrooms and children's rooms
MATERIAL
multi-chamber PVC profile
FEATURES
2-glazed package
excellent thermal insulation
profiles filled with thermal insulation material
high resistance to moisture
maintenance-free
special glazing package ensuring high load resistance
Cameo Dot anti-slip coating

WINDOW PANE	
construction A5	888.4H/16/44.2T
window package	48 mm
low-emission coating	▪
gas	argon
internal laminated glass	▪
external tempered glass	▪▪▪
warm spacer bar	▪
heat transfer coefficient of glass	Ug = 1,0 W/m²K
WINDOW	
window heat transfer coefficient	Uw = 0,99 W/m²K
water resistance	E1500
air permeability	Class 4
wind load resistance	Class C4
acoustic properties	Rw = 36 dB
impact resistance	Class 950
reaction to fire	E
resistance to external fire	Broof (t1)
COLOUR	
PVC	white
cladding	anthracite RAL 7016

AVAILABLE DIMENSIONS size symbol window size: width × height [cm]	01P 60×60	02P 90×60	12P 120×60	03P 70×70	04P 80×80	05P 90×90	06P 120×90	07P 100×100	08P 150×100	09P 120×120	10P 140×140	11P 220×120
PGX A5 WALK ON	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓